

CRAFTSMAN II

Extra Long-plank, Wide-width PureForm™ Solid Bamboo Flooring



FINE BAMBOO FLOORING, PANELS & WORKTOPS

Our classic PureForm™ bamboo in extra long planks for a traditional look with contemporary versatility. Featuring a tongue and groove profile for flexible installation, including an option to float this floor below grade. The wider, longer planks install faster and draw the eye creating an increased sense of space.



FEATURES + BENEFITS

PERFORMANCE

- Durable 7-step UV Cured Polyurethane coating with aluminum oxide wear layer for abrasion resistance
- Premium PureForm bamboo – averages 40% harder than oak
- Optimum 5.5 Moso Bamboo: Harvested at maturity for peak density, creating a harder and more stable product for lasting beauty and performance
- Approved for installation over radiant heat flooring systems

VALUE


- Lifetime structural warranty; 10-year heavy-use commercial/25-year residential finish warranties

ECOSMART

- Certified USDA BioPreferred – 99% biobased content

INDOOR AIR QUALITY


- Floorscore certified for superior indoor air quality.
- Qualifies for Collaborative for High Performance Schools 2009 Criteria EQ2.2.3 – Low Emitting Materials

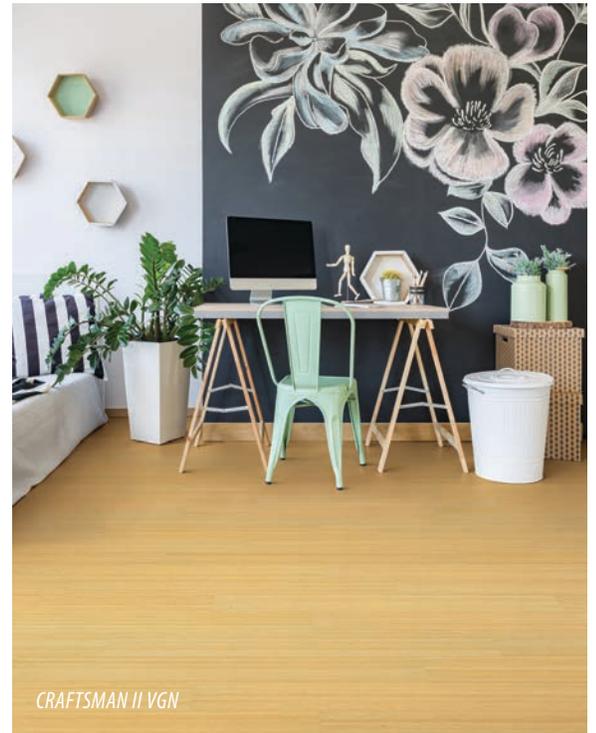

CRAFTSMAN II VGN

PRODUCT DETAILS

Nominal Dimensions :	75.59" x 5.43" x 0.59" (1920mm x 138mm x 15mm)
Construction:	Solid PureForm™ Traditional Bamboo
Milling:	4 Side Micro evel
Profile:	Tongue and Groove
Accessories:	Full line of coordinating 15mm accessories
Color Variation:	Moderate



LEED® CREDITS

- IEQ 4.3 Low Emitting Materials
- MR6 Rapidly Renewable Materials
- Certified Wood: MR7 – *available upon request

INSTALLATION + CARE

Installation Environment:	Nail, Staple, Glue and Float installation into environments having 35-55% RH. Can be installed over radiant heat.
Nail & Staple Installation:	On or Above grade. Use vapor retarder over wood subfloor.
Glue Installation:	On or Above grade. Use a vapor barrier over cement subfloor OR vapor retarder over wood subfloor.
Float Installation:	On, Above or Below grade. Use a vapor barrier with pad over cement subfloor OR vapor retarder with pad over wood subfloor.
Recommended Adhesive:	Premium Bamboo Flooring Adhesive
Nailing Guidelines:	15-16 gauge cleat or staple 1 1/2"-2"
Acclimation:	Minimum of 48 hours on-site in box
Maintenance:	TrueClean Floor Cleaner



Vertical Grain
Natural



Vertical Grain
Caramelized